

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 August 2003 (28.08.2003)

PCT

(10) International Publication Number
WO 03/070518 A1

(51) International Patent Classification⁷: **B60R 1/06,**
G02B 7/198

Maarten, Johannes [AU/AU]; 3 Halsbury Avenue,
Kingswood, S.A.5062 (AU).

(21) International Application Number: PCT/AU03/00204

(74) Agent: **MADDERNS**; Level 1, 64 Hindmarsh Square,
Adelaide, S.A. 5000 (AU).

(22) International Filing Date: 19 February 2003 (19.02.2003)

(25) Filing Language: English

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(26) Publication Language: English

(30) Priority Data:
PS0628 20 February 2002 (20.02.2002) AU

(71) Applicant (*for all designated States except US*):
SCHEFENACKER VISION SYSTEMS AUSTRALIA PTY LTD [AU/AU]; Sherriffs Road, Lonsdale, S.A. 5160 (AU).


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **SCHUURMANS,**

[Continued on next page]

(54) Title: MODULAR PIVOT ARRANGEMENT

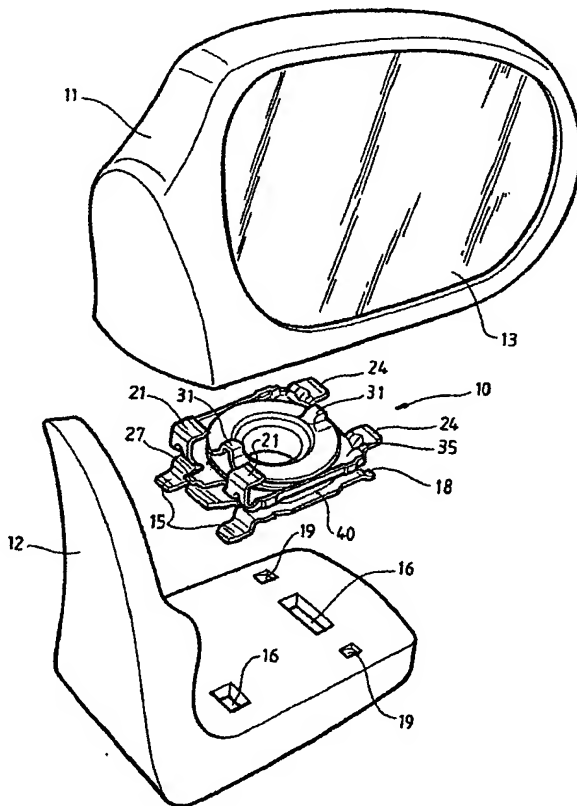

(57) Abstract: A pivot assembly (10) adapted to connect a mirror head (11) and a mirror mounting bracket (12) of a rear vision mirror assembly. The pivot assembly (10) has a spigot extending from a spigot plate (40), a plate (35) journaled to the spigot and a detent arrangement between the plate (35) and spigot. An attachment arrangement on both the spigot plate (40) and plate (35) allows the spigot plate (40) to be secured to either one of the mirror head (11) or the mirror mounting bracket (12). The attachment arrangement also allows the plate (35) to be secured to the other of the mirror head (11) or the mirror mounting bracket (12). A stop means associated with the spigot and adapted to engage with a stop arrangement on either the mirror head (11) or the mirror mounting bracket (12) limits rotation of the mirror head (11) with respect to the mirror mounting bracket (12).

WO 03/070518 A1